

# **QSI LASER DIODE**

## **SPECIFICATIONS FOR APPROVAL**

**Customer :**

**Model : QL63J5S-A/B/C-L**

*Tentative*

### **Signature of Approval**

**Approvaed by** \_\_\_\_\_

**Checked by** \_\_\_\_\_

**Issued by** \_\_\_\_\_

### **Approval by Customer**



**QSI Co., Ltd.**

315-9, Cheonheung-ri, Sungger-eup,  
Cheonan-city, Chungnam, Korea 330-836

**WWW.QSILaser.com**

# QL63J5S-A/B/C-L

*Tentative*

## InGaAIP Laser Diode

**Quantum Semiconductor International Co., Ltd.**

**Ver. 4 Mar. 2009**

### ◆ OVERVIEW

QL63J5S-A/B/C-L is a MOCVD grown 635nm band *InGaAIP* laser diode with quantum well structure. It's an attractive light source, with a typical light output power of 40mW for optoelectronic devices such as Optical Leveler and Modules.

### ◆ APPLICATION


- Bar Code Scanner
- Laser Module

### ◆ FEATURES

- Visible Light Output :  $\lambda_p = 635$  nm
- Optical Power Output : 40mW CW
- Package Type : TO-18 (5.6mm $\phi$ )
- Built-in Photo Diode for Monitoring Laser Diode

### ◆ ELECTRICAL CONNECTION

#### Bottom View

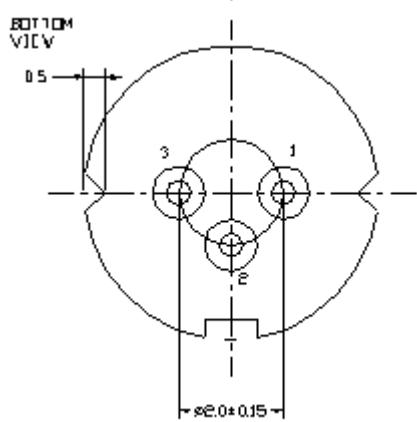

#### Pin Configuration

A	LD cathode, PD anode (Fig. 1)
B	LD , PD anode (Fig. 2)
C	LD anode, PD cathode (Fig. 3)

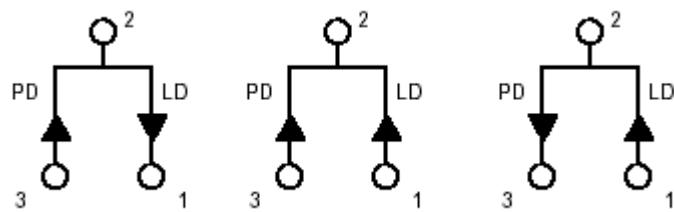


Fig. 1  
QL63J5SA-L

Fig. 2  
QL63J5SB-L

Fig. 3  
QL63J5SC-L

**Tentative**

◆ ABSOLUTE MAXIMUM RATING at Tc=25°C

Items	Symbols	Values	Unit
Optical Output Power	P	45	mW
Laser Diode Reverse Voltage	V	2	V
Photo Diode Reverse Voltage	V	30	V
Operating Temperature	Topr	-10 ~ +50	°C
Storage Temperature	Tstg	-40 ~ +85	°C

◆ ELECTRICAL and OPTICAL CHARACTERISTICS at Tc=25°C <sup>1)2)</sup>

Items	Symbols	Min.	Typ.	Max.	Unit	Condition
Optical Output Power	Po	-	40	-	mW	-
Threshold Current	Ith	-	50	80	mA	-
Operating Current	Iop	-	90	120	mA	Po=40mW
Operating Voltage	Vop	-	2.4	2.7	V	Po=40mW
Lasing Wavelength	λp	633	639	645	nm	Po=40mW
Beam Divergence <sup>3)</sup>	θ	8	10	12	deg	Po=40mW
	θ⊥	14	18	22	deg	Po=40mW
Beam Angle	Δθ	-	-	±2.0	deg	Po=40mW
	Δθ⊥	-	-	±3.0	deg	Po=40mW
Monitor Current	Im	0.01	0.3	0.9	mA	Po=40mW
Optical Distance	ΔX, ΔY, ΔZ	-	-	±60	μm	-

1) Initial values      2) All above values are evaluated with QSI's measuring apparatus

3) Full angle at half maximum

**NOTICE : QL63J5S-A/B/C-L Series to be operated on APC**

**The above product specifications are subject to change without notice.**