


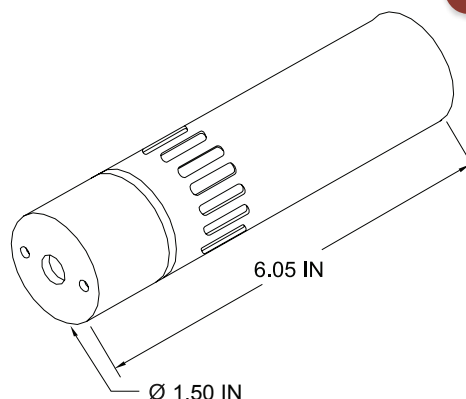

### Standard Features

- PID temperature control loop
- Constant current with automatic power control
- Precision current source

### Optional Features

- Analog modulation, or TTL digital modulation
- Circularized or standard elliptical beam
- Onboard microprocessor with software interface

### Applications

- Laser Projection Displays
- Metrology
- Microscopy
- BioAnalytics
- Lithography

### Single Mode Instrument Quality Lasers 375 - 500nm

Power Technology's Instrument Quality (IQ) series of laser diode modules are designed specifically to address the needs of high-end OEM applications requiring superior optical quality and ultra-stable temperatures, wavelengths & output powers.

With wavelengths ranging from 375 to 488nm, IQ series laser modules incorporate quality glass lenses to achieve optical clarity at up to 3000mA of drive current. For added beam quality, users may choose an IQ module with beam circularization.

All IQ lasers feature a precision current source and a PID temperature control loop that allows the unit to operate optimally at 8VDC at a wide temperature range of 15-35 C. This creates less excess heat within the laser module, increasing diode lifetime, efficiency and reliability.

### Specifications

|                                          | IQ1C65 (LD2011) | IQ1C165 (LD1992) | IQ1C75 (LD2006) | IQ1C17 (LD4071) | IQ1C55 (LD1911) | IQ1C95 (LD???) |
|------------------------------------------|-----------------|------------------|-----------------|-----------------|-----------------|----------------|
| Wavelength (nm)                          | 375             | 405              | 445             | 488             | 488             | 405            |
| Output Power (mW)                        | 65              | 165              | 75              | 17              | 55              | 135            |
| Temperature Stability (°C)               | ±0.1            | ±0.1             | ±0.1            | ±0.1            | ±0.1            | ±0.1           |
| Collimated Beam Size (1/e <sup>2</sup> ) | 1.04 x 2.21     | 1.04 x 1.72      | 0.89 x 2.38     | 0.95 x 2.74     | 1.19 x 2.86     | TBD            |
| Beam Divergence (mrad)                   | 0.47 x 0.22     | 0.50 x 0.31      | 0.65 x 0.25     | 0.66 x 0.23     | 0.53 x 0.22     | TBD            |
| Mode Structure                           | Single          | Single           | Single          | Single          | Single          | Multi          |
| Operating Voltage (VDC)                  | 8               | 8                | 8               | 8               | 8               | 8              |
| Typical Operating Current (mA)           | 450             | 450              | 450             | 450             | 450             | 450            |
| Max Operating Current (mA)               | 3000            | 3000             | 3000            | 3000            | 3000            | 3000           |
| Temperature Range (°C)                   | 15-35           | 15-35            | 15-35           | 15-35           | 15-35           | 15-35          |
| Size                                     | 6.05" x Ø1.50"  | 6.05" x Ø1.50"   | 6.05" x Ø1.50"  | 6.05" x Ø1.50"  | 6.05" x Ø1.50"  | 6.05" x Ø1.50" |